


TIME CODE GENERATOR for the SR-112

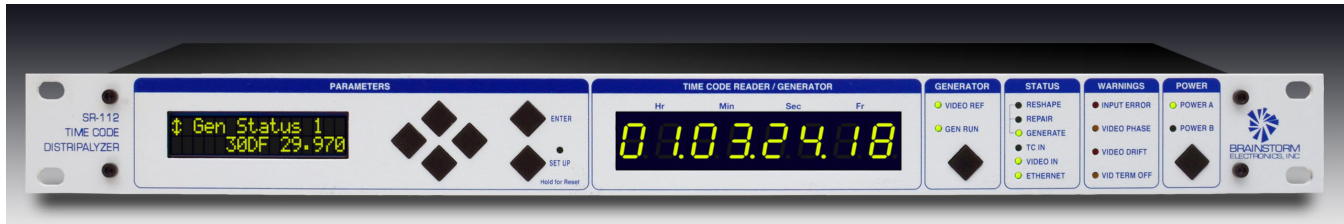

A software module that generates and repairs Time Code

GENERATE MODE

Mode used to generate new time code - internal crystal or external reference

- REFERENCE: Internal / Ext Video (HD & SD)
- FORMAT: 24/ 25/ 30ND / 30DF
- RATES: 23.97 /24 / 25 / 29.97 /30
- START TIME: User definable
- GEN RUN BUTTON: Starts and stops the generator from the front panel



REPAIR MODE

Mode used to repair existing time code, by either regenerating or Jam Syncing

- REGENERATE: Regenerates the exact input time code.
Locks to the incoming time code and reduces jitter
Ideal for edit lists and loops. 1 frame delay
- JAM SYNC: Generates new time code based on the incoming time code
Locks to external video
Selectable Ramp up times: 5fr / 1.5 sec / 3 sec
Selectable Freewheel window: 5fr/ 15fr / infinity
Video Phase Correction
Drift warning



INPUT DELAY

Enables the user to create an offset, in ms, between the input and the output. Ideal when the audio is ahead of the picture for lip-syncing.

Available in all modes



For sales and product information:

Main Office
info@plus24.net
 1155 N. La Brea Ave. - W. Hollywood, CA 90038 - USA
 Tel: +1 (323) 845-1171 • Fax: +1 (323) 845-1170

plus24
www.plus24.net

European Office:
 BEE DISTRIBUTION
info@beedistribution.com
 1453 Chaussée de Waterloo - 1180 Brussels - BELGIUM
 Tel: +32 2 / 653 90 77